



LUNADA  
BAY TILE

LUCE


APPLICATIONS AND TESTING



2" Hex



Clipper

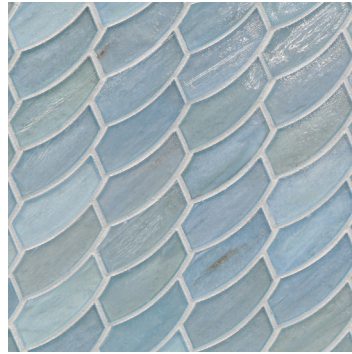

Feather



Fin

RECOMMENDED USAGE

	Suitable
Walls/Backsplashes	●
Shower Wall	●
Steam Shower	●
Pool Water Line	●*
Pool, Spa or Water Feature (fully submerged)	●*
Fire Features	●**

FLOOR APPLICATIONS

	Test Method BOT-3000	Suitable
Interior Dry	N/A	●
Interior Wet	≥ 0.42	●
Exterior Wet	≥ 0.60	
Exterior Sloped Areas	≥ 0.65	

*DCOF value of ≥ 0.42 is accepted value for use in commercial applications. A137.1 -2012*

PRODUCT SPECS

Size	Sheet Size	Sheet Per Box
2" Hex	0.95 SF	5 Sheets/ 4.75 SF
Clipper	0.79 SF	5 Sheets/ 3.95 SF
Feather	0.81 SF	5 Sheets/ 4.05 SF
Fin	0.84 SF	5 Sheets/ 4.20 SF
Shade Variation	Grout Joint Recommendation	
V2 - V3 Substantial variation	1/16" (1.6 mm)	

TESTING

Breaking Strength	ASTM C648	>350 PSI
Water Absorption	ASTM C373	< 0.01%
Chemical Resistance	ASTM C650 w/ pool chemistry	Unaffected
Freeze/Thaw	ASTM C1026	Unaffected
Thermal Shock	ASTM C484	Passed

NOTES

Since variations are common in artistic glass tile, we recommend final selection be made from an actual tile mock-up. To achieve optimal results in shading, layout and design, tile sheets should be randomly selected from multiple boxes during installation. We recommend a minimum of 10% overage on all orders, depending on the size of the order. Installation constitutes acceptance.

Luce Series tile is paper-face mounted.

\* 2" Hex and Feather only. Clipper and Fin sizes are not recommended for submerged applications.

\*\* Acceptable for use near open flame or heat source; however, it is not considered 'Fire Glass'.